

BendiSonde Technical Specification

Description Articulated Sonde Transmitter.

Part No. 10/AS1336 - USA BendiSonde
10/AS1336-M10 - M10 BendiSonde

Physical


Construction Articulated nylon 66 body and nickel plated brass battery compartment.
Weatherproof to NEMA 6P and IP67.

Dimensions 47.5 x 2.3 cm (18.8 x 0.9 in.).

Weight 500 g (1.1 lb).

Shipping Weight 1 kg (2.2 lb).

Minimum Bend Size Pipe - 5 cm (2 in.).
Radius - 10 cm (4 in.).

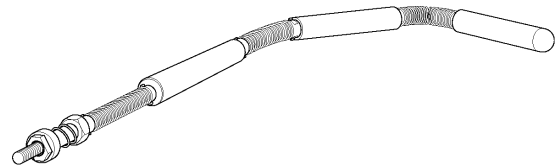

Operating Frequency 512 Hz.

Signal Continuous.

Depth Range Down to 6 m (20 ft).

Batteries 1 x LR6 (AA) 1.5 V alkaline. 15 hours life, nominal @ 20°C (68°F) continuous use.

Operating Temperature Range -10°C to +85°C (+14°F to +185°F).


Submersion Level 20 m water (2 bar pressure).

Humidity Up to 95% non-condensing.

Miscellaneous

Compatibility Recommended Radiodetection Receivers: RD432PDL.-2 or any 512Hz Radiodetection Locator.

Quality Control Vibration and bump tested to BS2011 Part 2.1.
BS5750/ISO 9001/EN29001.

EMC  Complies with European EMC Directive 89/336/EEC.
Complies with FCC requirements.

Warranty 12 months.

Contact Your Radiodetection Dealer



Radiodetection

Riser Bond Dielectric Technologies
Bicotest Pearpoint Telespec

TRENCHLESS
UTILITY EQUIPMENT INC.

2070 Queensway Drive, P.O. Box 1338 Burlington,
ON L7R 4L9 Ph: (905) 634-0669 Fax: (905) 634-6685
info@trenchlessutility.com