


## Mighty Mouse/Slim Sonde Technical Specification

---

<b>Description</b>	Mighty Mouse - Sonde Transmitter. Slim Sonde – Sonde Transmitter
<b>Part No.</b>	<b>10/SD0322-33R-33 kHz.</b>
<b>Physical</b>	
Construction	Nylon 66 body with nickel plated brass battery housing.
Dimensions	18.1 x 2.2 cm (7.1 x 0.8 in.).
Weight	220 g (8 oz).
Shipping Weight	500 g (1.1 lb).
<b>Operating Frequency</b>	8 kHz (8192 Hz) or 33 kHz (32768 Hz).
<b>Signal</b>	Continuous
<b>Depth Range</b>	Down to 3.5 m (12 ft).
<b>Batteries</b>	1 x LR6 (AA) 1.5 V alkaline. 12 hours life, continuous use.
<b>Operating Temperature Range</b>	-15°C to +50°C (+5°F to +122°F).
<b>Submersion Level</b>	20 m water (2 bar pressure).
<b>Thread</b>	M10 male.
<b>Miscellaneous</b>	
Compatibility	Recommended Radiodetection Receivers: C.A.T+. (Mighty Mouse) Recommended Radiodetection Receivers: RD300 & RD400 Range (Slim Sonde)
Quality Control	BS5750/ISO 9001/EN29001.
EMC	☑ Complies with European EMC Directive 89/336/EEC.
Warranty	12 months.

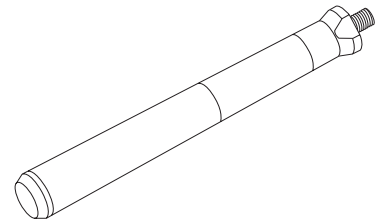

Contact Your Radiodetection Dealer



2070 Queensway Drive, P.O. Box 1338 Burlington,  
ON L7R 4L9 Ph: (905) 634-0669 Fax: (905) 634-6685  
info@trenchlessutility.com